





Notes

24V DIN Rail Mountable Power Supply

- Universal AC Input / Full Range
- Protections: Short Circuit / Overload / Over Voltage
- Cooling by Free Air Convection
- DIN Rail TS-35/7.5 or 15 Compatible
- LED Indicator for Power On














		UK
L	7	CA


Part # DC Voltage Inted Current Interest Range Inted Power Interest Range Interes	### 4010-0021 24V 6.5A / 230VAC, 5.2A / 115VAC 0 ~ 6.5A / 230VAC, 0 ~ 5.2A / 115VAC 156W / 230VAC, 125W / 115VAC 150mVp-p 24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC 3000ms, 60ms / 115VAC @ Full Load
ted Current rrent Range ated Power & Noise (max) ² ge Adj. Range ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	6.5A / 230VAC, 5.2A / 115VAC 0 ~ 6.5A / 230VAC, 0 ~ 5.2A / 115VAC 156W / 230VAC, 125W / 115VAC 150mVp-p 24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC
rrent Range ated Power & Noise (max) ² ge Adj. Range ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	0 ~ 6.5A / 230VAC, 0 ~ 5.2A / 115VAC 156W / 230VAC, 125W / 115VAC 150mVp-p 24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC
ated Power & Noise (max) ² ge Adj. Range ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	156W / 230VAC, 125W / 115VAC 150mVp-p 24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC
& Noise (max) ² ge Adj. Range ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	156W / 230VAC, 125W / 115VAC 150mVp-p 24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC
ge Adj. Range ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	150mVp-p 24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC
ge Adj. Range ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	24 ~ 28V ±1.0% ±0.5% ±1.0% 1500ms, 60ms / 230VAC
ge Tolerance ³ e Regulation d Regulation p, Rise Time ⁵	±0.5% ±1.0% 1500ms, 60ms / 230VAC
e Regulation d Regulation p, Rise Time ⁵	±0.5% ±1.0% 1500ms, 60ms / 230VAC
d Regulation p, Rise Time ⁵	±1.0% 1500ms, 60ms / 230VAC
p, Rise Time ⁵	1500ms, 60ms / 230VAC
• /	
Up Time (Typ.)	
	16ms / 230VAC & 10ms / 115VAC @ Full Load
Itage Range	90 ~ 264VAC, 127 ~ 370VDC
uency Range	47 ~ 63Hz
	87%
AC Current (Typ.)	2.6A / 115VAC
	1.7A / 230VAC
Current (Typ.)	20A / 115VAC & 35A / 230VAC
kage Current	<1mA / 240VAC
	105 ~ 150% / 115VAC rated output power
Overload ⁷	105 ~ 130% / 230VAC rated output power
	Protection Type: Constant current limiting, recovers automatically after fault condition removed
Over Voltage	29 ~ 33V
	Protection Type: Shut down o/p voltage, re-power on to recover
	N/A
	-20 ~ 60°C
	20 ~ 95% RH non-condensing
	-40 ~ 85°C, 10-95% RH
	±0.03%/°C (0 ~50°C) 10 ~500Hz, 2G 10min. / 1 cycle, period for 60min. along X, Y, Z axis
	CE UKCA, UL, EAC
	I/P-O/P: 3KVAC, I/P-FG: 2KVAC, O/P-FG: 0.5KVAC
	I/P-O/P, I/P-FG, O/P-FG: >100M Ohms / 500VDC / 25°C / 70% RH
	1.57 x 4.93 x 4.47 inches
Dimension (W*H*D)	[40 x 125.2 x 113.5 mm]
C C C C C C C C C C C C C C C C C C C	h Current (Typ.) lkage Current Overload ⁷ over Voltage C OK Signal orking Temp. lking Humidity orage Temp., Humidity opp. Coefficient Vibration ertifications estand Voltage tion Resistance

- 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
- 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF & 47μF parallel capacitor.
- 3. Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies
- 5. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to an increase of the set-up time.
- 6. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft).
- 7. Hiccup mode at 90 ~ 100VAC, recovers automatically after fault condition is removed.



4010-0021

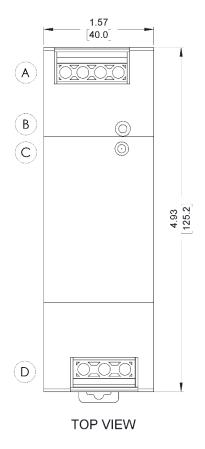

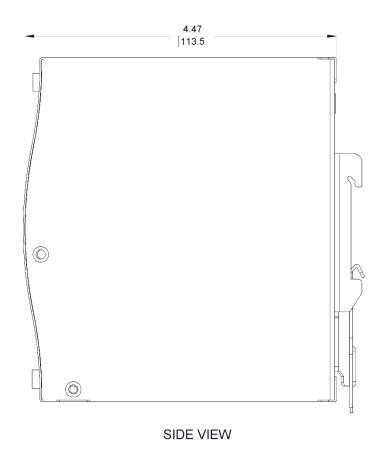

- A VDC Output
- B Voltage Adjustment Screw
- C Power On Indicator LED
- D VDC Input